



ULTRATECNO
POWER ULTRASONIC CLEANING

ACM-500N

High Power Ultrasonic
Cleaner for Heavy Duty
applications



FOE[®]
Floating
Oil Extraction

ARF[®]
Acoustic
Reduction Filter

LFS[®]
Laminar
Flow System

Pneumatic
Platform lift


Insulated lid

ARF[®] noise
reduction

Triple thermal
insulation

Full Stainless steel
construction

Protected
Ceramic Heaters

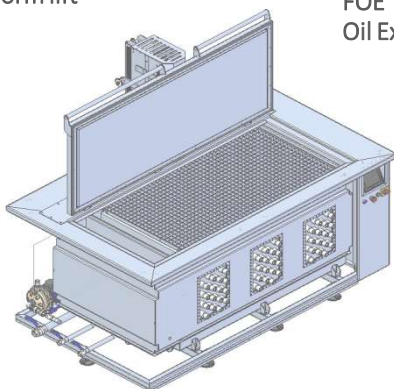


FOE[®] Floating
Oil Extraction

LFS[®] Oil
Separation

28 kHz Powerful
Ultrasound

Replaceable
transducers

Maximum Useful dimensions

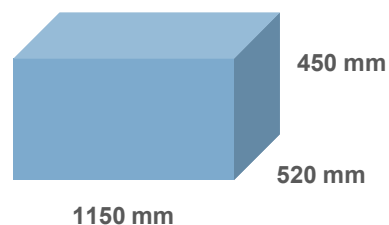

450 mm

520 mm

1150 mm

*At least 100-150 mm of free space surrounding the parts
is required to allow proper ultrasonic diffusion.
Don't overload the tank, to get good cleaning performance.*

The most powerful Ultrasonic equipment at market

UltraTecno
Valencia, SPAIN
+34 961 666 565 - info@ultratecno.es
www.ultratecno.eu

Main tank internal dimensions	1200 x 670 x 730 mm (587 lt)
Full stainless steel construction	AISI 304/316L - 3 mm thickness - Height adjustable legs
External Dimensions with Top Lid Open / Weight	2010 x 1220 x 1812 mm / 675 kg

Ultrasonic System Frequency	28 kHz
Ultrasonic Actual Power	4000 W (4 sets) Synchronized Generators
Sweep Frequency	Digital $\pm 2\%$ for smooth & safe cleaning
Ultrasonic Emitters Sets	316L Flanged assembly at walls (replaceable)
Noise Reduction System	Patented ARF© <78db (A)

Elevator for agitation with platform lift	Pneumatic, max load 350 kg
---	----------------------------

Oil Separation System	Patented LFS© with Pump, Auxiliary tank & Automatic extraction
LFS® Recirculation pump	Stainless Steel EBARA CDX

Heating System	11 kW Ceramic Heaters into protective stainless-steel housing
Acoustic & Thermal Insulation thickness	Fire & Sound proof Stone rock 50 mm
Insulated Top Lid	Automatic (pneumatic) 30 mm thermal & acoustic insulation
Safety water Level Sensor	Electronic IFM LMT-102 (SS316-PEEK)

Inset Multilanguage 7" Color HMI Touch screen	Manual & Automatic Preset Cycles Full process parameters customization Heating & US Programmable Timer / Preventive Maintenance Schedule Electrical Consumption Monitor / Detergent calculator / Hourly & starts counter
---	---

Optional Devices Available	Filtering / Automatic Water Refill / Hybrid Heating / Small parts basket / Steam Extraction / Automatic Top Lid Opening / Hands Free Operation Pedal
----------------------------	--



28kHz
Synchronized



Durable
Construction



Green
Label



Low noise
Emission



Smart
Interface



Best cost effective
Cleaner